



Rotating Tank Cleaner LPR-TB


Technical Data Sheet

The rotating nozzle head LPR TB has a uniform spray that is highly effective and efficient. The water creates a focused, effective jet on the surface. Due to the high impact of the medium, the dirt is dissolved rapidly, thereby saving on water and chemicals.

Applications

Can be used in the beverage, food, chemical, and pharmaceutical industry, as well as for milk production


Spray pattern

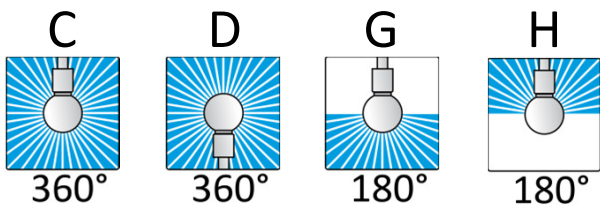

Specifications

Cleaning radius max:	2 m
Container opening min:	ø 55 mm
Operating pressure max: Recommended operating pressure:	12 bar ab 2 bar
Flow rate min / max:	40 / 120 l/min
Operating temperature max:	100° C
Standard materials:	1.4435 (316L), PTFE
Also available:	Electrically conductive PTFE with 2% FDA approved carbon filler Hastelloy HC22
Use in ATEX areas possible:	Only on request
Available certificates:	2.2 / 3.1 / FDA

Cleaning radius [m]

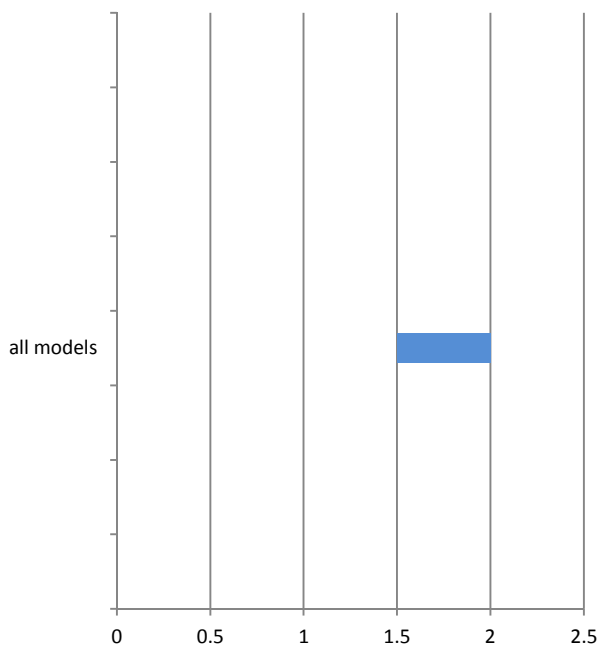

Water consumption [l/min]

